


Pressure-Temp. Rating : CF8M Triple vs Steam
Leakage Class : VI

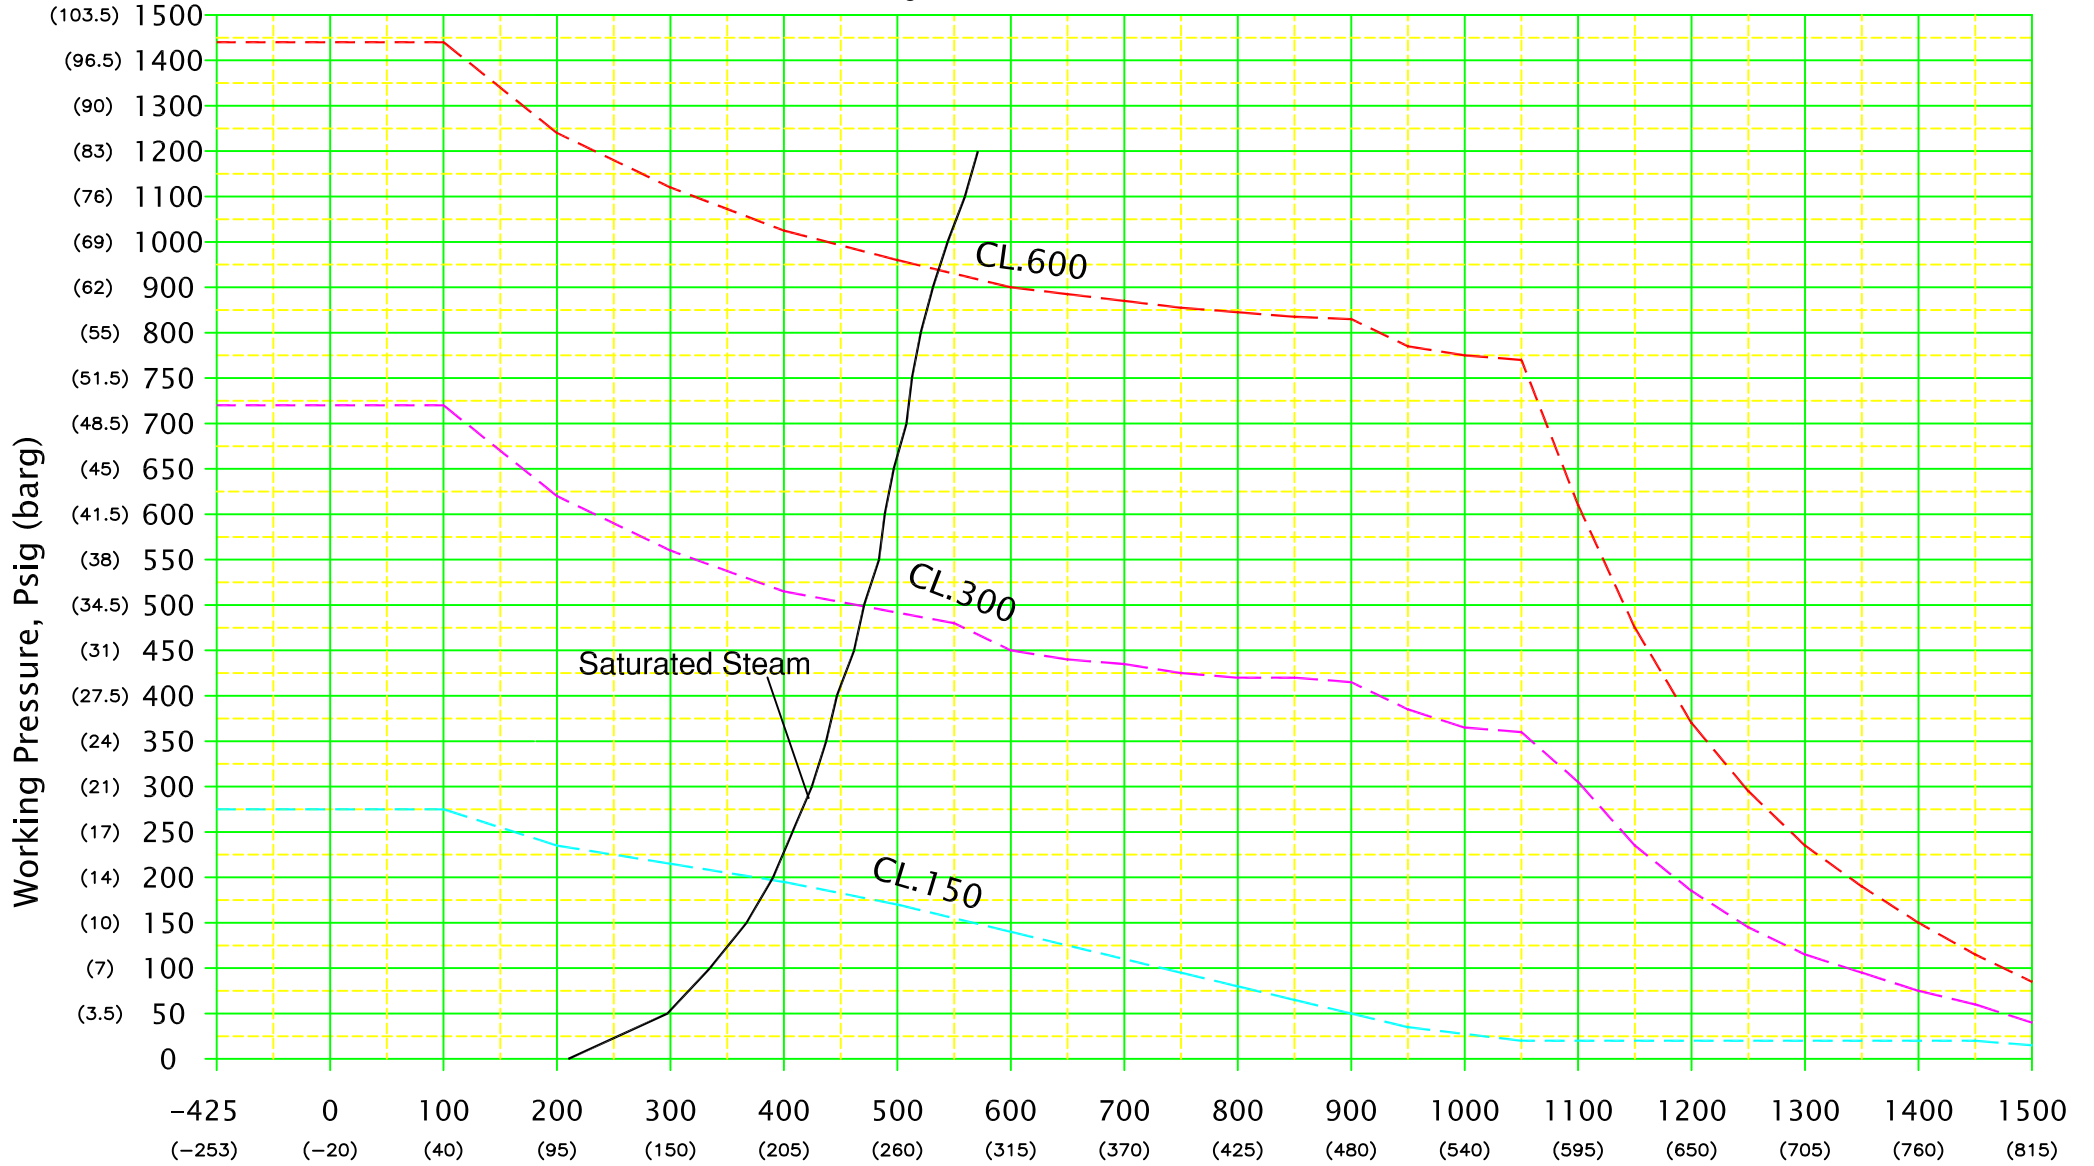

Max. applicable Temp. for Stem & Seat;

STEM;

17-4PH : -100F ~ 800F, Duplex : -60F ~ 800F, Monel : -425F ~ 900F, Nitronic50 : -325F ~ 950F, HastelloyC : -20F ~ 1000F, Inconel718 : -425F ~ 1500F

SEAT;

SS316 : -425F ~ 900F, 316/Graphite : -425F ~ 1000F, 316/Stellite : -425F ~ 1200F, Inconel/Graphite : -325F ~ 1500F

Temperature, °F (°C)